

SAVE THESE INSTRUCTIONS AND REFER TO THEM WHEN ADDITIONS TO OR CHANGES IN THE PROJECTS CONFIGURATION ARE MADE.

Specifications

Flexible	Low Power Consumption	Easy Installation
High Luminosity	Long Life	Waterproof IP68
Low Voltage	Single Pixel or Macro Control	







Description

	SMD	Light Source			
White	Blue	Green	Red	Amber	Light Color
	0.5in				LED Spacing
					Brightness (lumen)
	120°				Beam Angle
	~100,000 hours				Life Span
	22W				Power Consumption
	120V AC in / 12V DC out				Voltage
	360				Number of LEDs
	19.6 ft				Max Length
					Casing Color
					Cover Material
					Light Holder Material
	2in				Cutting Unit
	IP68				Protection Rating
	-40°C - 80°C				Operating Temperature



SAVE THESE INSTRUCTIONS AND REFER TO THEM WHEN ADDITIONS TO OR CHANGES IN THE PROJECTS CONFIGURATION ARE MADE.

Dimension [mm]

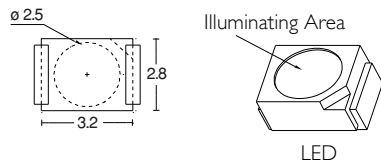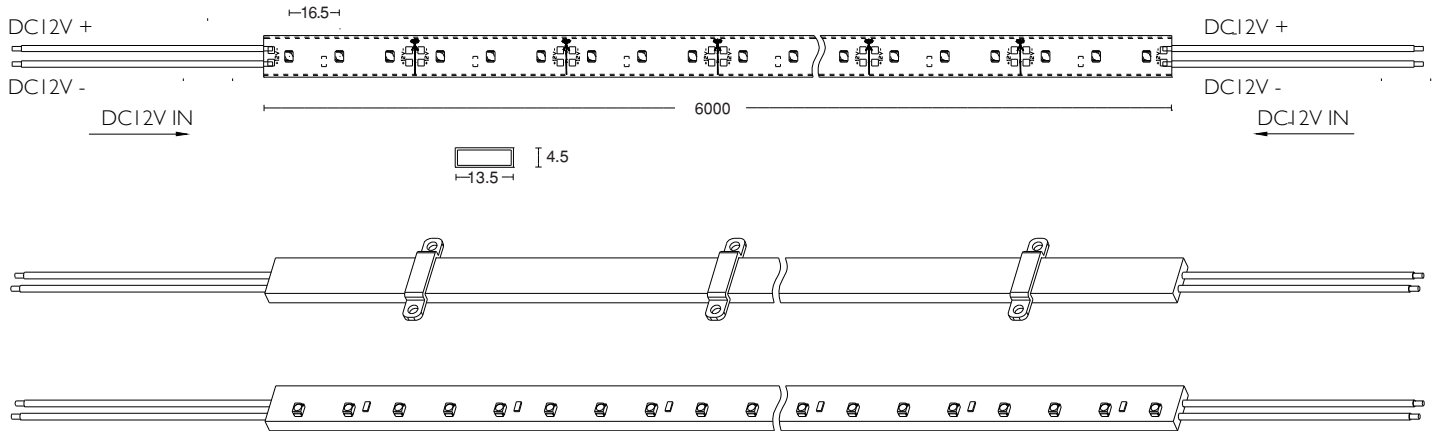

Terminal Cap

