


RHODES

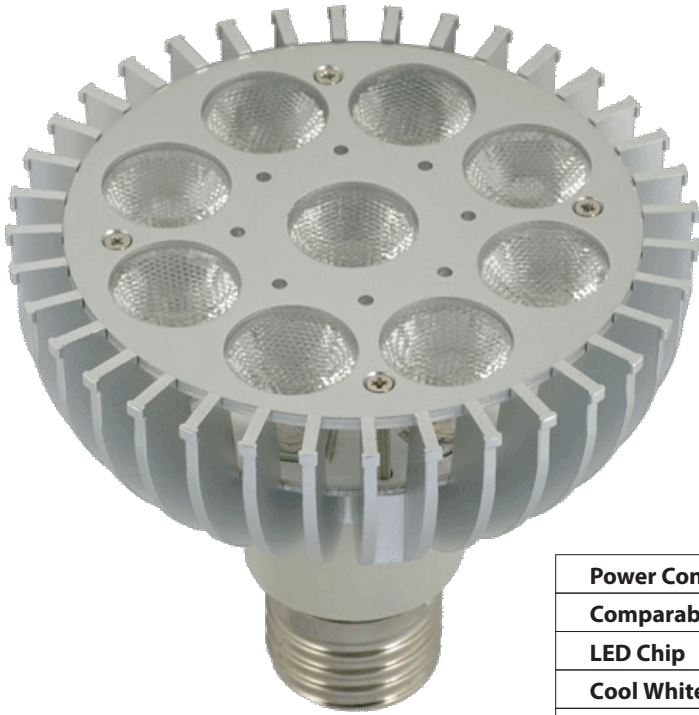


Type	Wattage
PAR-30	14 Watt
Max lumen output 750	

- This bulb is not dimmable. Do not use with dimmers.

Power Consumption	LEDs: 12Watt Total: 14Watt
Comparable Bulb	75W Halogen (PAR-30)
LED Chip	1.3-Watt Cree® XLamp® XRE LEDs
Cool White	Lamp output: 750 Lumen (LED: 900 Lumen)
Warm White	Lamp output: 600 Lumen (LED: 720 Lumen)
Beam Angle	Spot (8°), Narrow (21°), Flood (41°), Wide (approx. 88°) Wide-spot* (16°), Narrow-flood* (26°)
Bulb / Socket Type	PAR-30 / E26/E27
Color Temperature	Cool white (5500~6500K) Warm white (2580-3500K) Neutral white (4000~4500K) (special order only)
Life Span ¹	80,000 hours (max)
Voltage	85 ~ 265V AC (Universal)
Number of LEDs	9 LEDs
Housing	Aluminum, PC
Operating Temperature	-40°C ~ 40°C

1- Used in 25°C ambient temperature. At 80,000 Hours, the LED bulb brightness is at half of the initial light output.

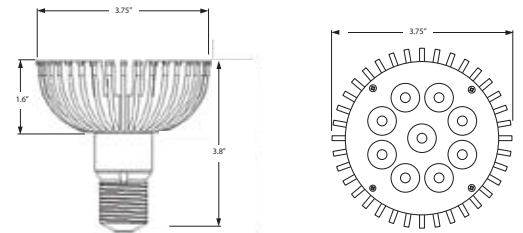

RHODES



LUX & Spot Diameter Table

Sku #	Color Temp	Beam Spread	Candela cd/klm	Illumination (Lux)/Spot Diameter						
				30cm	50cm	100cm	150cm	200cm	250cm	280cm
LW10-4000-A14-CXX-W3K	Warm White	Spot (8°)	12600cd/klm	161080LUX/ø10cm	50451LUX/ø15cm	12600LUX/ø20cm	5500LUX/ø35cm	2860LUX/ø45cm	1980LUX/ø55cm	1556LUX/ø70cm
LW10-4000-A14-CXB-W3K*	Warm White	Wide-spot (16°)	4999cd/klm	69534LUX/ø20cm	21664LUX/ø35cm	5499LUX/ø67cm	2399LUX/ø80cm	1375LUX/ø105cm	899LUX	676LUX
LW10-4000-A14-CXD-W3K	Warm White	Narrow (21°)	2441cd/klm	23403LUX/ø45cm	8915LUX/ø55cm	2441LUX/ø85cm	1093LUX/ø100cm	616.2LUX	398.5LUX	316.6LUX
LW10-4000-A14-CXE-W3K*	Warm White	Narrow-flood (26°)	936cd/klm	11387LUX/ø55cm	4698LUX/ø65cm	1136LUX	521LUX	219LUX	186LUX	128.5LUX
LW10-4000-A14-CXF-W3K	Warm White	Flood (41°)	787cd/klm	8034LUX/ø60cm	3205LUX/ø75cm	787LUX	358LUX	199.6LUX	132.2LUX	107.3LUX
LW10-4000-A14-CXG-W3K	Warm White	Wide (88°)	183.3cd/klm	1965LUX	722LUX	183.3LUX	84.8LUX	48.7LUX	32.2LUX	26.9LUX
LW10-4000-A14-CXX-W5K	Cool White	Spot (8°)	18500cd/klm	181080LUX/ø10cm	60451LUX/ø15cm	18500LUX/ø20cm	6500LUX/ø35cm	3560LUX/ø45cm	2380LUX/ø55cm	1856LUX/ø70cm
LW10-4000-A14-CXB-W5K*	Cool White	Wide-spot (16°)	7010cd/klm	81454LUX/ø20cm	25211LUX/ø35cm	7010LUX/ø67cm	3010LUX/ø80cm	1721LUX/ø105cm	1150LUX	891LUX
LW10-4000-A14-CXD-W5K	Cool White	Narrow (21°)	3430cd/klm	33005LUX/ø45cm	12430LUX/ø55cm	3430LUX/ø85cm	1502LUX/ø100cm	8790LUX	561LUX	456LUX
LW10-4000-A14-CXE-W5K*	Cool White	Narrow-flood (26°)	1400cd/klm	14420LUX/ø55cm	5670LUX/ø65cm	1400LUX	540LUX	370LUX	251LUX	172LUX
LW10-4000-A14-CXF-W5K	Cool White	Flood (41°)	1009cd/klm	10300LUX/ø60cm	4110LUX/ø75cm	1009LUX	460LUX	256LUX	169.5LUX	137.6LUX
LW10-4000-A14-CXG-W5K	Cool White	Wide (88°)	235cd/klm	2520LUX	926LUX	235LUX	108.8LUX	62.5LUX	41.4LUX	34.5LUX

*Wide-spot and Narrow-spot are available for special order only.