


Broadway LED Cuttable Light Bar

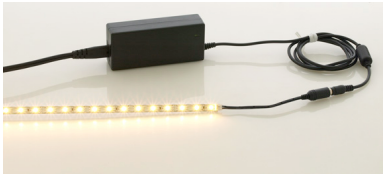

Broadway with 12VDC 50W Power Supply and Light Bar Adapter Cable

Broadway LED Cuttable Light Bar comes in 19-inch segments. Up to 20 of these untrimmed segments can be daisy-chained and powered by one power supply. Each segment boasts 30 LEDs.

- Its low heat generation makes it perfect for display cases, under cabinet, and shelf lighting
- Very wide viewing angle: 120°
- 12V DC Power Supply required (sold separately)
- Can be used with Dimmable LED Power Supply
- UL listed (UL 2108)



Broadway Light Bar with a mounting clip



Bar to bar connector (included)

Specifications


LED chip	SMD RGB LED
Beam angle	Approx. 120°
Lumen	100 lumens per light bars (Cool white)
LED forward current	200mA
Dimensions	L485 x W8 x H6 mm (cutting unit length: 48mm)
Life span	50'000 hours (average)
Voltage	12V DC
Wattage	2.4 Watt per light bars
Number of LEDs	30 LEDs per light bars (10 cuttable units, 3 LEDs per cutting unit)
Protection rating	(indoor only)
Certifications	UL 2108
Operating temperature	-40 ~ 60°C (-40 ~ +140°F)

Part Numbers (SKUs)

Color temp.	Kelvin	Material	SKU
Warm white	3000~3500K	InGaAlN	LW20-2100-A22-E3G-W3K
Neutral white	4000~4500K	InGaAlN	LW20-2100-A22-E3G-W4K
Cool white	5500~6000K	InGaAlN	LW20-2100-A22-E3G-W5K

Accessories (sold separately)

A. 12VDC Power Supply (w/ DC plug, 50W)	LW20-1100-A-DC81514
B. Light Bar Adapter Cable	LW20-1100-A-PSC-81514
C. Mounting Clips for for Broadway (4 clips)	LW20-1100-CLIP
D. Dimmable LED Power Supply (60W)	LW20-1000-60-DC3820

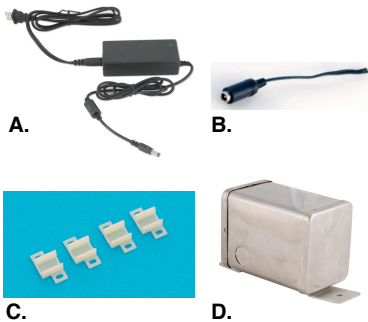

Circuit Diagram

